

# H40-042-30-075

## Industrial IP67 / IK10 PoE Switch



The H40-042-30-075 is Industrial Gigabit Adjustable PoE Switch designed with IP67 & IK10, 6KV PoE Ethernet port surge protection, 10KV surge protection in AC power, and operation temperature between -40°C and 65°C during harsh weather conditions. They enable outdoor connections of PoE PDs to the network such as outdoor IP cameras, wireless APs, and other industrial applications. The H40-042-40-075 provides 4 ports Gigabit PoE with 1 port Gigabit RJ45 as well as additional SFP transceiver slots for flexible uplink.


The H40-042-30-075 as easy-to-install power source equipment (PSE) and provide power up to 30W per port.



### Features

- Flexible SFP transceiver port for uplink
- IP67 standard
- IK10 impact rated cast aluminum housing
- Operating temperature between -40°C and 65°C
- 30W IEEE802.3at PoE port x4
- Supporting 10/100/1000Mbps data rates
- 6KV PoE surge protection
- IEEE 802.3az Energy Efficient Ethernet standard for green power

### Applications

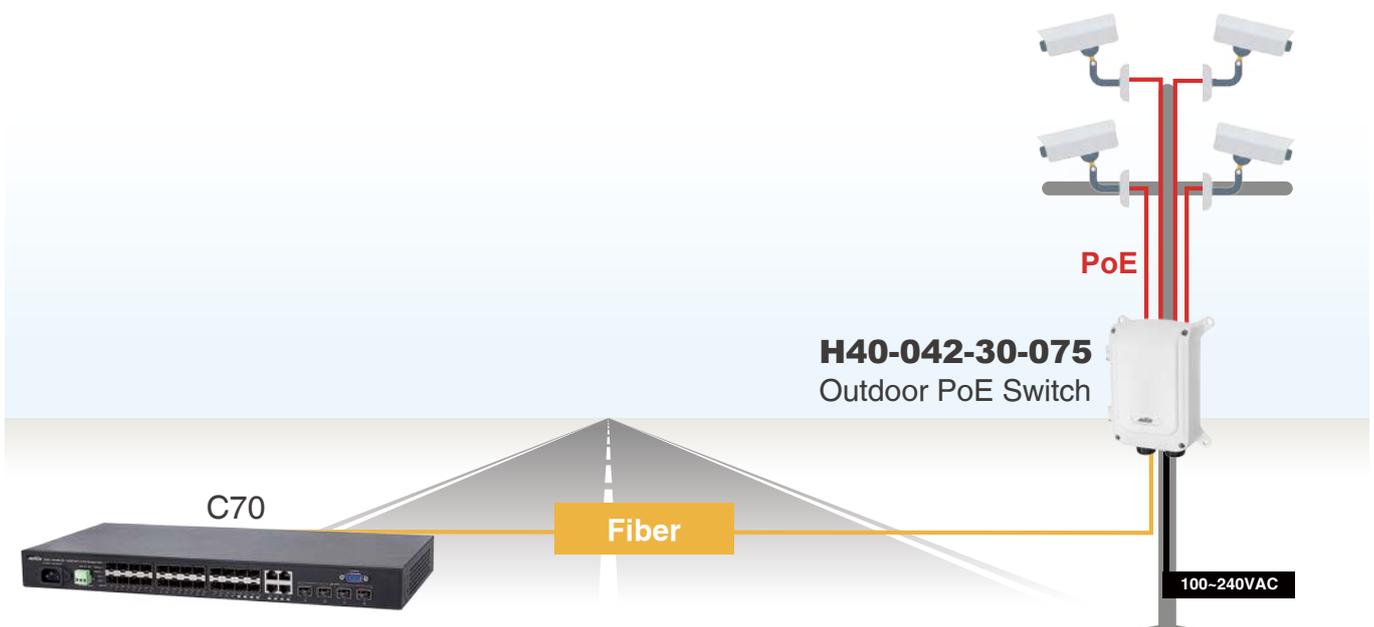

# Specifications

H40-042-30-075	
<b>Networking Specifications</b>	
Total Gigabit Ports	6
Gigabit 802.3 at PoE Port (10M/100M/1G)	30W x4
Gigabit RJ45	1
Gigabit SFP Slot	1
Forwarding Capacity	11.904Mpps
Mac Table	8k
Jumbo Frames	9,216 Bytes
Switching Capacity	12 Gbps
<b>Power Specifications</b>	
Input Voltage	100VAC ~ 240VAC 280VAC 4hr 300VAC 1min.
Backup Power Input Voltage	48~56VDC
Output Voltage Range / port 1~port 4	54 VDC PoE IEEE 802.3af (Max. 15.4W) output PoE+ IEEE802.3at (Max. 30W) output
Power Budget	75W
Surge Protection /each PoE Port	6KV
Surge Protection for AC power	10KV
<b>Mechanical Specifications</b>	
Dimensions (L x W x H)	255.2 x 199.9 x 90 mm
Weight	3.2 kg (7.05 lb)
Connectors	M25 x 2
<b>Environmental Specifications</b>	
Weather Rating	IP67
Vandal Proof	IK10
Operating Temperature	-40°C ~ 65°C (-40°F ~ 149°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Operating Humidity	5% ~ 95% non-condensing
<b>Certifications</b>	
EMC	CE, FCC, VCCI, C-Tick Class A
Safety	EN60950-1, IEC60950-1
Surge	EN61000-4-5

## Optional Accessories

SFP Modules			
 <p><b>SFP-ISX-X5</b> Industrial Gigabit SFP Transceiver</p> <ul style="list-style-type: none"> <li>• MMF</li> <li>• 0.5 km</li> <li>• -40°C ~85°C</li> </ul>	 <p><b>SFP-ISX-02</b> Industrial Gigabit SFP Transceiver</p> <ul style="list-style-type: none"> <li>• MMF</li> <li>• 2 km</li> <li>• -40°C ~85°C</li> </ul>	 <p><b>SFP-ILX-10</b> Industrial Gigabit SFP Transceiver</p> <ul style="list-style-type: none"> <li>• SMF</li> <li>• 10 km</li> <li>• -40°C ~85°C</li> </ul>	 <p><b>SFP-ILX-40</b> Industrial Gigabit SFP Transceiver</p> <ul style="list-style-type: none"> <li>• SMF</li> <li>• 40 km</li> <li>• -40°C ~85°C</li> </ul>
Pole Mount Brackets		Corner Mount Bracket	
 <p><b>AT-100</b> Pole Mount Adapter</p>	 <p><b>AT-101</b> Pole Mount Adapter</p>	 <p><b>AT-200</b> Corner Mount Adapter</p>	