


# Saflok Messenger LENS Hub

## Specifications

|                       |                                                                                                                                                                                                                                                     |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standards / Protocols | 2.4 GHz DSS, IEEE 802.15.4, Zigbee compliant platform, DHCP, DNS Discovery                                                                                                                                                                          |
| I/O Port              | 1 x 10 Mbit PoE capable Ethernet                                                                                                                                                                                                                    |
| Cabling Type          | Ethernet – RJ45 Cat 5 or better                                                                                                                                                                                                                     |
| RF Data Rate          | 3 Mbps                                                                                                                                                                                                                                              |
| RF Sensitivity        | Better than -97dBm                                                                                                                                                                                                                                  |
| Transmit Power        | 10 mW for 71562 (Europe/Asia)<br>158 mW for 71563 (North America)<br>87 mW for 71564 (International)                                                                                                                                                |
| Dimensions            | 6" x 3 ½" x 1" (Wall Mount)    6" x 3 ½" x 7/8" (Table Top)                                                                                                                                                                                         |
| Unit Weight           | 200 grams                                                                                                                                                                                                                                           |
| Power Input           | 802.3af PoE, 2 watts                                                                                                                                                                                                                                |
| Alternate Power Input | External 5VDC 300mA (-ZBW & ZBWE models only)                                                                                                                                                                                                       |
| Certifications        | Part 15.247 Modular License – FCC ID:SAPMESSENGER2GHZ<br>Europe and Canada CE Approval – IC: 7078A-A28780<br>China Radio Approval – CMIIT ID: 2009DJ0666 (71562 only)                                                                               |
| Operating Temperature | 0 to 55 degrees Celsius                                                                                                                                                                                                                             |
| Indoor Range          | External 5VDC 300mA (-ZBW & ZBWE models only) 30 meters (74562)                                                                                                                                                                                     |
| Package Options       | 74564-ZAW, 74563-ZAW, 74562-ZAW, J-box wall mount (POE only)<br>74564-ZBW, 74563-ZBW, 74562-ZBW, Table Top<br>74564-ZAWE, 74563-ZAWE, 74562-ZAWE, J-box wall mount (Environmental)<br>74564-ZBWE, 74563-ZBWE, 74562-ZBWE, Table Top (Environmental) |

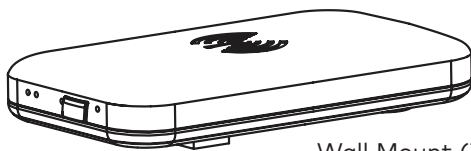

Wall Mount (ZAW)

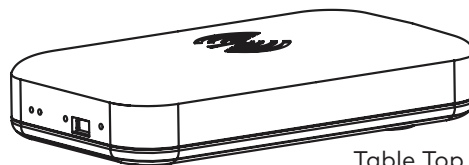


Table Top (ZBW)

\* Port locations shown for desktop package (ZBW)